


AI Accelerator & GPU

MXM Module M3A500-PP

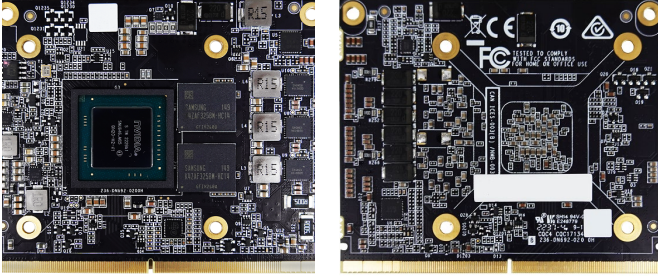


Features

- NVIDIA RTX A500 Embedded GPU based on Ampere architecture
- 2048 CUDA cores, 16 RT cores and 64 Tensor cores, 4GB GDDR6 memory
- PCIe Gen 4 x4 interface
- 7.28 TFLOPS peak FP32 performance

Specifications

Model Number	M3A500-PP	
GPU Engine Specs	NVIDIA RTX A500 Architecture: NVIDIA Ampere CUDA Cores: 2048 Tensor Cores: 64 RT Cores: 16 Floating Point Performance: 6.54 TFLOPS	NVIDIA RTX A500 Architecture: NVIDIA Ampere CUDA Cores: 2048 Tensor Cores: 64 RT Cores: 16 Floating Point Performance: 7.28 TFLOPS
Core Clock (MHz)	Base= 652 / Boost= 1597	Base= 1155 / Boost= 1777
Memory Specs	Size: 4GB GDDR6 Clock: 14 Gbps Interface Width: 64-bit Bandwidth (GB/sec): 112	
Feature Support	PCI Express 4.0 x4 DirectX: 12 Ultimate Open GL 4.6 Vulkan 1.2	
Display	N/A (MS-Hybrid Mode)	
Power Consumption	Total Graphics Power (TGP): 35W	Total Graphics Power (TGP): 45W
Form Factor	MXM Graphics Module Version 3.1, Type A	
Dimensions (WxD)	82.0 x 70.0 mm (3.22" x2.75")	
Net Weight	0.037 kg (0.082 lb)	
Vibration	2.4Grms, @5~500 Hz, Sine, 0.5Hr/axis	
Temperature	Standard: Operating Temp. :0 to + 55°C (32°F ~131°F) / Extended Operating Temp. :-40 to + 85°C (-40°F ~185°F) / Storage Temperature: -40 to + 85°C (- 40°F ~ 185°F)	
Humidity	95% @ 40°C Related Humidity, Non-condensing	
OS Support	Windows 10/11 64-bit	
Certification	CE/FCC/UKCA	

System & Mounting Dimensions

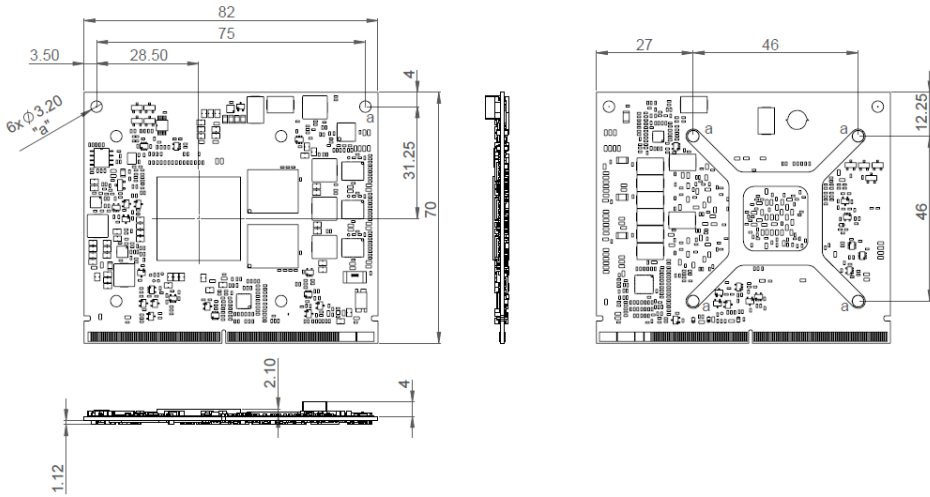

Ordering Information

Model name	Description
M3A500-PPA-A1	MXM-A, NVIDIA RTX A500, Gen4.0 x4, 4GB GDDR6, MSH, 45W, 0°C to +55°C
M3A500-PPW-A1	MXM-A, NVIDIA RTX A500, Gen4.0 x4, 4GB GDDR6, MSH, 45W, -40°C to +85°C
M3A500-PPA-A2	MXM-A, NVIDIA RTX A500, Gen4.0 x4, 4GB GDDR6, MSH, 35W, 0°C to +55°C
M3A500-PPW-A2	MXM-A, NVIDIA RTX A500, Gen4.0 x4, 4GB GDDR6, MSH, 35W, -40°C to +85°C

Accessory (Optional)

Part No.	Description
92-6MXM4H-1001	PCIe Carrier Board, MXM3.1, Gen4.0 x16, 4x HDMI, 0°C to +55°C (MXM-A04)
3906000000S010	MXM-A Cooler, TWO BALL, 12V 4PIN, L:200mm 6000RPM, 72*62*27.65mm, AL6063, 0°C to +55°C

